


P R E M I U M

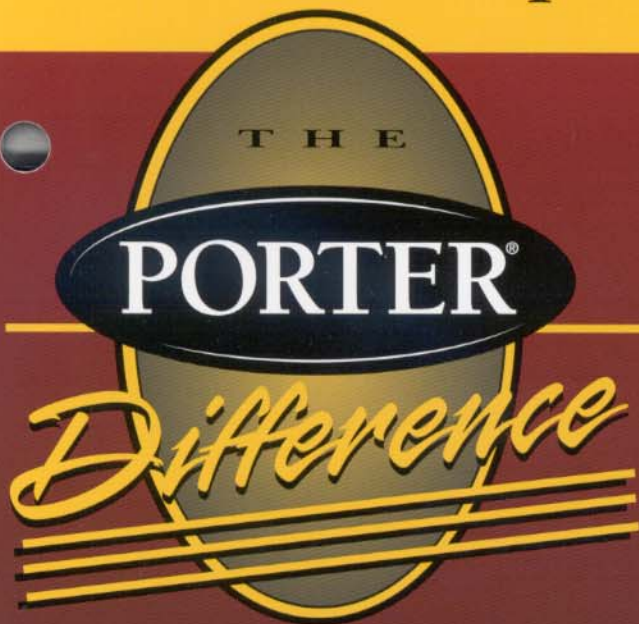

Hiding

The Difference is... **Hiding**. One great cover-up! Hide old coats of paint easily with the interior acrylic latex primer that does it all: *BLANKit* from Porter Paints. Use it on interior wood, masonry, drywall and plaster surfaces to achieve thorough color coverage and excellent uniformity in fewer coats. The next time you need a good cover, pick up *BLANKit*.

- Hides like a finish coat with excellent enamel hold-out
- Provides superior uniformity and a smoother appearance in fewer coats
- Works well on multiple surfaces, including interior wood, masonry, drywall, and plaster

New Wood & Trim

Drywall

Stains



Crayon & Marker

Existing Paint

Paneling

BLANKitTM

INTERIOR PRIMER/FINISH

BLANKit™

INTERIOR PRIMER/FINISH

1129 White (Tintable)

1127 XD Base

BLANKit is a multi-purpose water-based acrylic primer that has the amazing capacity to hide just about everything. It will even cover permanent marker and crayon. For new wood, trim and drywall, BLANKit is the ideal primer. Over existing oil or water-based paint, over wood paneling and wallpaper, nothing covers like BLANKit. And it dries fast. In as little as one hour it's ready for recoating. Plus, you get the added benefit of low odor, easy clean-up with water, and excellent chip, peel, and blister resistance. When you start with BLANKit, you'll get a winning finish every time.

Uses

For interior application over existing water or oil-based paints and under conventional paint finishes and wallpaper. Use as a base coat on bare wood, drywall and plaster. Use as a finish coat on primed wood, metal, and properly prepared previously painted or varnished surfaces.

	BLANKit	Conventional Water Based Primers	Alcohol Based Primers	Alkyd Based Primers
Hiding	Excellent	Satisfactory	Fair	Satisfactory
Chip, Peel and Blister Resistance	Excellent	Excellent	Fair	Fair
Odor	Low	Low	Strong	Strong
V.O.C.	Low	Low	Very High	High
Recoat Time @ 70°F	Minimal (1 hour)	Minimal (1-2 hours)	Minimal (30 min.)	Average (4 hours)
Adhesion	Excellent	Very Good	Very Good	Excellent
Color Availability	Excellent Tintable White Plus XD Base	Fair White or Light Colors Only	Poor White	Fair White or Light Colors Only
Ease of Clean-Up	Excellent	Excellent	Poor*	Poor**
Ease of Application	Excellent	Very Good	Fair	Satisfactory
Stain Blocking	Very Good	Satisfactory	Excellent	Excellent

* Requires Denatured Alcohol

** Requires Mineral Spirits

Features

- Water-Based
- Fast Drying
- Blocks Stains
- Excellent Hide
- Easy to Sand
- Low Odor
- Easy to Apply
- Wide Color Availability

Benefits

- Saves time, effort and material
- Maintains beautiful topcoat appearance
- Excellent chip, peel and blister resistance
- Easy clean-up with water

Product Data

Bases and Colors

1129 White (Tintable)

1127 XD Base

Sheen, 85°

Flat (Typical range: 0-3)

Drying Time @ 70°F & 50% R.H.

To Touch: 30 minutes

To Recoat: 1 hour.

Recommended Coverage

Up to 400 sq. ft. per gallon when applied on smooth surfaces.

4.0 mils wet film thickness – 1.4 mils dry film thickness

Thinner & Clean-Up

Thinner: Water

Clean-Up: Warm, Soapy Water


Application

Nylon brush, synthetic roller, or spray.

Recommended Spray Tip: .15"–.17"

Limitations: Do not apply when room or wall temperatures are below 50°F. For some stain blocking situations, two coats of BLANKit may be required. For severe water, smoke or grease stains, or for knots, we recommend the use of Porter Paints' *Sta-Kil*® No.164.

Precautions: Prior to using this product, the user is specifically directed to obtain and read the current Material Safety Data Sheet and Label for this product. If after reading these documents you do not understand them, do not use this product. KEEP OUT OF REACH OF CHILDREN.

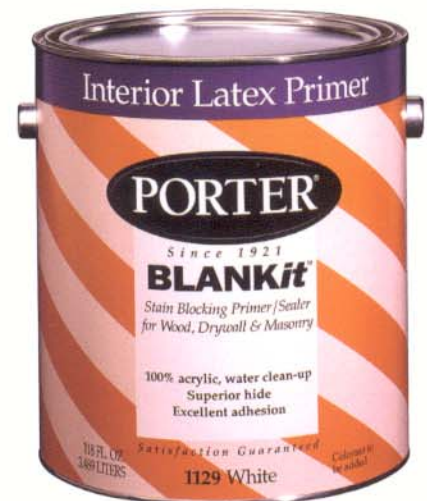

PORTER

P A I N T S

A PPG Brand PPG

We Earn Our Stripes Every Day!™

PORTER PAINTS

400 South 13th Street
Louisville, KY 40203

1-800-332-6270

www.porterpaints.com • For Internet Ordering www.getpaint.com

The technical data furnished is true and accurate to the best of our knowledge. However, no guarantee of accuracy is given or implied. We assume no responsibility for coverage, performance or injuries resulting from use. Liability, if any, is limited to replacement of products. Technical data are subject to change without notice.

#6195/E 10M 4/01