

P R E M I U M

Hi-Hide[®]

Latex Wall & Trim Paints



- *Excellent Hiding Power*
- *Available in Flat, Eggshell, Satin, and Semi-Gloss*
- *Durable Paint Films*
- *Low Odor*
- *Easy Soap and Water Clean-Up*



We Earn Our Stripes Every Day!™

A PPG Brand





Hi-Hide®

PAINTS

PRODUCT DATA

689 Series Flat
389 Series Eggshell
379 Series Satin
109 Series Semi-Gloss


HI-HIDE is Porter's family of high quality interior paint finishes for residential, institutional, and commercial use. HI-HIDE products are made with durable vinyl acrylic resins that withstand day-to-day wear even in high traffic areas. Painting professionals will appreciate the outstanding wet and dry hiding, coverage, and excellent touch-up ability. Do-it-yourself customers will admire the easy application, soap and water clean-up, and the rainbow of nearly 1200 beautiful DESIGN SPECTRUM® colors.



Available in flat, eggshell satin and semi-gloss. Ask your Porter Sales Representative for details.

Features

- Excellent Hiding Power
- Fast Drying
- Water Based
- Excellent Flow and Leveling
- Durable Vinyl Acrylic Resins
- Low Odor

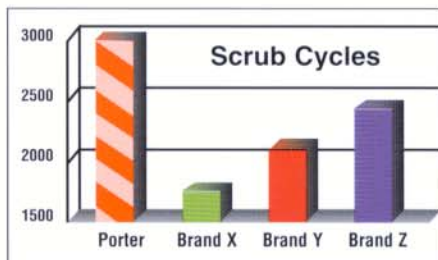

HI-HIDE Eggshell is up to 72% more washable than other national brands!**

Benefits

- Economical – Saves Time and Material
- Complete Projects in a Single Day
- Easy Soap and Water Clean-up
- Smooth Uniform Finish
- Washable Paint Films



HI-HIDE Semi-Gloss provides excellent flow and leveling and is ideal for interior woodwork, doors, and trim.



HI-HIDE Flat or Eggshell products offer outstanding hiding and application properties, and are ideal for walls in high traffic areas.

** Based on tests conducted in Porter R&D laboratories using a GARDCO® Washability & Wear Tester Model No. D12V, under identical test conditions.

The technical data furnished is true and accurate to the best of our knowledge. However, no guarantee of accuracy is given or implied. We guarantee our products to conform to Porter quality control. We assume no responsibility for coverage, performance or injuries resulting from use. Liability, if any, is limited to replacement of products. Technical data are subject to change without prior notice.

Product Data

Bases

Pastel Base Deep Base
Light Base UD Base

Sheens

689 Series Flat
389 Series Eggshell
(typically 3-8 units @ 60°, 10-20 @ 85°)
379 Series Satin
(typically 18-24 units @ 60°)
109 Series Semi-Gloss
(typically 55-65 units @ 60°)

Drying Time @ 70°F & 50% R.H.

		To Touch	To Recoat
689	Flat	15 mins.	4 hrs.
389	Eggshell	2 hrs.	4 hrs.
379	Satin	2 hrs.	4 hrs.
109	Semi-Gloss	2 hrs.	4 hrs.

Recommended Coverage

400-500 sq. ft. per gallon when applied on smooth surfaces.

Thinner & Clean-Up

Thinner: Water
Clean-Up: Warm, Soapy Water

Primers

Wood:	335, 1129 or 135
Drywall:	426, 867, or 1129
Plaster:	335, 867 or 1129
Masonry:	335, 867 or 896
Metal:	
Steel	272, 276, 286, 296, 299 or 215
Galvanized	215, 290 or 299

Application

Nylon brush, roller, or spray